


WILLOW CONSTRUCTION

(Goldsboro Community Health Center) **T37752**

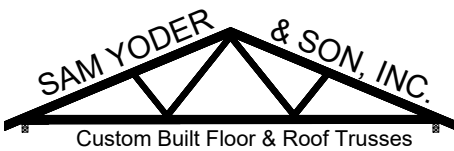

GENERAL NOTES:

- 1) FLOAT CEILING DRYWALL AT INTERIOR PARTITIONS TO PREVENT CEILING/WALL SEPARATION.
- 2) DO NOT CUT, DRILL, OR NOTCH TRUSS MEMBERS. WITHOUT PROFESSIONAL APPROVAL.
- 3) REFER TO HIB-91 SUMMARY SHEET FOR RECOMMENDATIONS ON HANDLING, INSTALLING, AND BRACING OF TRUSSES.
- 4) COORDINATE LAYOUT OF TRUSSES WITH MECH. CONTRACTORS

HANGER KEY

QTY	SYMBOL	CODE	DESCRIPTION
48	1	JUS26	Slant Nail Hanger
12	2	THD26	Heavy Truss Hanger
5	4	HJC26	Hip & Jack Hanger

TIE-DOWN SCHEDULE

** One RT7 per bearing point unless noted differently

QUAN.	SYMBOL	REF. #	DESCRIPTION
245	A	RT7	Truss to double plate clip
128	B	RT16	Truss to dbl. plate (high wind)
2	C	RT 20	Truss to Stud
8	D	HUGT 2	Girder Tiedown